



NUSTRI

MADE IN ITALY



Ironing machines for knitwear factories, laundries and clothes factories



 **MOD. 1090/VC**


Press for the hosiery sector with inclined, vaporizing and vacuum lower surface **cm 360x90**. Sliding upper surface **cm 180x90** steam heated and not vaporizing. Prearranged for the connection to central source of steam .



Ironing machines for knitwear factories, laundries and clothes factories

TECHNICALS CHARACTERISTICS	MOD.	P1090/VC
UPPER SURFACE	-	NOT STEAMING
DOUBLE LOWER SURFACE	-	STEAMING
UPPER SURFACE HEATING	-	BY STEAM
LOWER SURFACE HEATING	-	BY STEAM
ELECTRIC VACUUM Hp.0,6 Volts 220 x 2	Kwatt.	0.4 x 2
LOWER SURFACE DIMENSIONS	Cm.	365 x 90
UPPER SURFACE DIMENSIONS	Cm.	180 x 90
VACUUM PIPE DISCHARGE	Ø	100 mm
AIR PRESSURE	bar	7
COMPRESSED AIR FEED	Ø	3/8"
MAXIMUM STEAM PRESSURE	bar	6
STEAM INLET	Ø	1/2"
CONDENSE OUTLET	Ø	1/2"
COMPRESSED AIR CONSUMPTION	Lt.	50 - 100
STEAM CONSUMPTION	Kg/h	20 - 30
SURFACE HEATING	-	STEAMING
MAXIMUM TOTAL POWER	Kwatt.	1,3
ELECTRIC FEED	Volts.	220 *
TENSION	Hz.	50 *
NET WEIGHT	Kg.	900
DIMENSIONS H x L x D (with opened upper surface)	Cm.	186 x 365 x 135
* Different technicals characteristics are available on demand.		


Surface dimensions

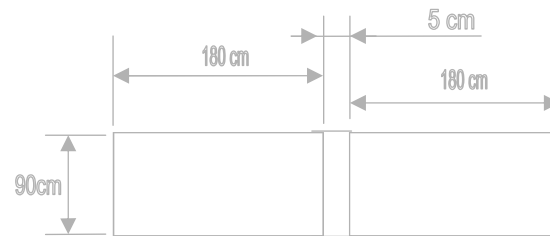

Complete of

- ◆ Double lower surface **cm 360x90**
- ◆ Upper surface **cm 180x90**
- ◆ Steaming timer
- ◆ Air suctioning timer
- ◆ Locking timer
- ◆ Switch for working as press or as table
- ◆ Vacuum and steaming lower surface
- ◆ Steam heated not vaporizing upper surface
- ◆ Electric-vacuum
- ◆ Pneumatic suctioning valve
- ◆ Prearranged for the connection to central source of steam

Encombrance

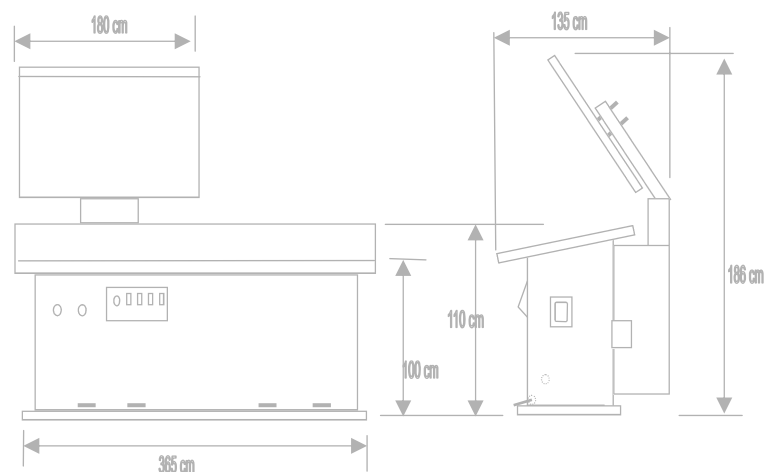

We keep the right to change details without notice