

Ironing machines for knitwear factories, laundries and clothes factories




## MOD. 320/M

Manual **trouser's** ironing press. Steam heated and steaming upper surface. Vacuum and suctioning lower surface. Arranged for the connection with centralized steam source.




## Ironing machines for knitwear factories, laundries and clothes factories

TECHNICALS CHARACTERISTICS	MOD.	320/M
UPPER SURFACE	-	STEAMING
LOWER SURFACE	-	STEAMING
UPPER SURFACE HEATING	-	BY STEAM
LOWER SURFACE HEATING	-	BY STEAM
VACUUM	Kwatt.	0.4
VACUUM DISCHARGE PIPE	Ø	100 mm
STEAM SUPPLY	ø	1/2"
STEAM PRESSURE	bar	5
STEAM CONSUMPTION	kg/h	18 - 20
CONDESATE INLET	ø	1/2"
ELECTRIC FEED	Volts.	230/400 *
TENSION	Hz.	50 *
DIMENSION H x L x D	Cm.	170 x 125 x 120
NET WEIGHT	Kg.	310
* Different technicals characteristics are available on demand.		

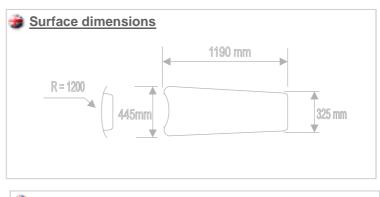

## Complete of

- Foot-board and safety frame for upper surface
- Steam heated and steaming upper surface
- Steaming and suctioning lower surface
- Both the surfaces are stuffed
- Electric vacuum
- Pneumatic suction valve
- Pressure regulator
- Steaming timer
- Suctioning timer
- Lock upper surface
- Arranged for the connection with centralize source of steam and air.

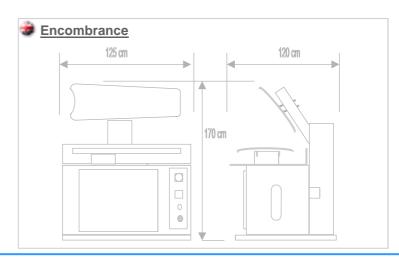



NUSTRI IRONING SYSTEMS

Via della Mora, 7 50058 SIGNA (FI) ITALY Telephone: 0039 055-8734007 Telefax: 0039 055-8735123 Internet: www.nustri.com