

Ironing machines for knitwear factories, laundries and clothes factories






MOD. 80/VC

Vacuum, heated and steaming inclined ironing table cm 180x80 to be connected to an outside source of central steam. Complete of steaming timer and fabric beater. Ironing arm and iron are not included.

Ironing machines for knitwear factories, laundries and clothes factories

TECHNICALS CHARACTERISTICS	MOD.	80/VC
STEAM CONSUMPTION	Kg/h	10 - 14
AIR DISCHARGE	mm.	100
ELECTRIC VACUUM Hp.0.6 Volts 220	Kwatt.	0.4
MAXIMU STEAM PRESSURE	bar	6
IRON Volts.220	Kwatt	0.8
STEAM INLET	Ø	1/2"
CONDENSATE DISCHARGE	Ø	1/2"
SURFACE HEATING	-	steaming
SURFACE DIMENSIONS	Cm.	180 x 80
MAXIMUM TOTAL POWER	Kwatt.	1,2
ELECTRIC SUPPLY	Volts.	220
TENSION	Hz.	50 *
NET WEIGHT	Kg.	210
DIMENSIONS H x L x D	Cm.	100 x 200 x 80
* Different technicals characteristics are available on demand.		

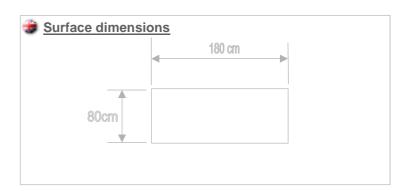


Complete of

- One solenoide valve
- ♦ Fixed iron support on the back side
- Steaming timer
- ♦ Cable support
- Steaming treadle
- Vacuum treadle

Spare parts on demand

- One iron with electric cable and steam hose
- Second iron gruop
- Vacuum and electrically heated ironing arm
- ♦ Steam gun

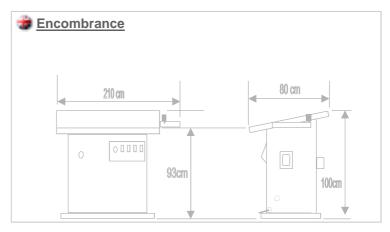





NUSTRI IRONING SYSTEMS Via della Mora, 7 50058 SIGNA (FI) ITALY

Telephone: 0039 055-8734007 Telefax: 0039 055-8735123

Internet: www.nustri.com