

Ironing machines for knitwear factories, laundries and clothes factories






MOD. 32/A

Vacuum and electrically heated ironing table complete of completely automatic boiler It 5, electropump for water supply and one iron. Surface dimensions cm 130 x 65. Prearranged for the connection with ironing arm.

Ironing machines for knitwear factories, laundries and clothes factories

TECHNICALS CHARACTERISTICS	MOD.	32/A
BOILER'S CAPACITY	Lt.	5 *
WATER ELECTROPUMP Volts.220	Kwatt.	0,4
STEAM PRODUCTION	Kg/h	6,2 - 8,2 *
BOILER DISCHARGE	Ø	1/2"
AIR DISCHARGE PIPE	mm.	100
COMPLETE VACUUM Hp.0.6 Volts 220	Kwatt.	0.4
STEAM PRESSURE	bar	3,5
WATER INLET	Ø	3/8"
SURFACE HEATING	Kwatt	1.6
IRON Volts.220	Kwatt	0.8
SURFACE DIMENSIONS	Cm.	130 x 65
BOILER ABSORPTION	Kwatt.	4.5 - 6*
TOTAL MAXIMUM POWER	Kwatt.	6.5
ELECTRIC SUPPLY	Volts.	380+N+T *
TENSION	Hz.	50 *
NET WEIGHT	Kg.	110
DIMENSIONS H x L x D	Cm.	102 x 157 x 65
* Different technicals characteristics are available on demand		

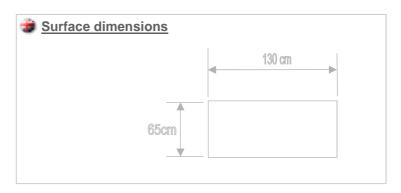


Complete of

- ♦ Completely automatic boiler 5 lt
- ♦ Steam solenoid valve
- Electropump for water supply
- One iron
- ♦ Suction treadle
- Square iron rubber mat
- Arrangment for lux connection
- Cable support

Spare parts on demand

- Vacuum heated ironing arm
- Second iron
- ♦ Steaming gun
- PVC tank 25 lt

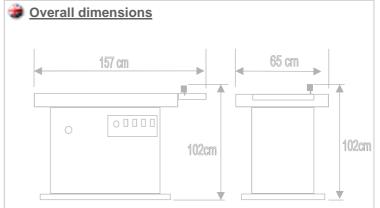





NUSTRI IRONING SYSTEMS Via della Mora, 7 50058 SIGNA (FI) ITALY

Telephone: 0039 055-8734007 Telefax: 0039 055-8735123

Internet: www.nustri.com